



ELECTRIC PIZZA & BAKE DECK OVENS



Model EP-2-2828

Specifications

- Bakers Pride EP-EB Series Electric Deck Ovens are designed for high volume pizza, baking, roasting and all-purpose operations. Interior decks are 28" (711mm) deep and 28" (711mm) wide. Overall dimensions are 33 1/4" (845mm) by 42" (1067mm) wide.
- Each oven has one or two decks with separate tilt-up door(s). Each door has glass windows and are spring balanced. Ovens may be stacked in any combination up to 4 decks high.
- Oven exteriors are all heavy-gauge, stainless steel and are fully insulated for cooler outer temperatures and consistent interior temperatures. Oven interiors are manufactured of high-heat resistant aluminized steel.
- Each deck features independent, operator controlled top & bottom, infinite heat for perfectly balanced results and a 200°-700° F (93°-371° C) thermostat. 5 1/4" (133mm) interior deck height with 3/4" (19mm) thick hearth stone deck on EP units. Steel deck standard on the EB units.
- EP (pizza) models feature a 15 minute timer. The EB (bake) models feature a 60-minute electric timer. Both models have a continuous-ring, audible timer alarms and manual shut-offs.
- Single deck models are 4,750 watts and double deck models are 9,500 watts. Voltages are available in 208V 220/240V 1 phase & 3 phase as well as 230/400V 3 phase with neutral 50Hz
- 2828 may be stacked on Bakers Pride convection ovens.
- 1 year limited part & labor warranty.

MODELS: EP-1-2828
EP-2-2828
EB-1-2828
EB-2-2828

Standard Features

- 2828 Singles at 4,750 watts in 208 and 220/240V and 230/400V in 50 Hz
- 2828 doubles at 9,500 watts in 208 & 220/240V and 230/400V in 50 Hz
- 200°- 700°F (93°- 371°C) thermostat
- Infinite Top & bottom heat controls per deck
- Electric, 15 or 60-minute timer with continuous ring alarm and manual shut-off. Timers not provided on export models.
- Interior oven lights
- 5 1/4" (133mm) Interior deck heights with hearth stone decks
- All stainless steel exteriors
- Aluminized steel interiors
- Spring balanced doors with windows
- 4" legs for countertop use
- Fully insulated
- 1 year limited part & labor warranty

Options & Accessories


- Steel decks in lieu of hearth stone
- Set of 30" legs with or without casters
- Set of 16" legs with or without casters for double stacked ovens
- Stainless steel undershelves
- Rack stand with rack guides & stainless steel undershelf
- Stacking kits
- Steel deck on EP units
- Hearth stone decks on EB units

Certifications





ELECTRIC PIZZA & BAKE DECK OVENS

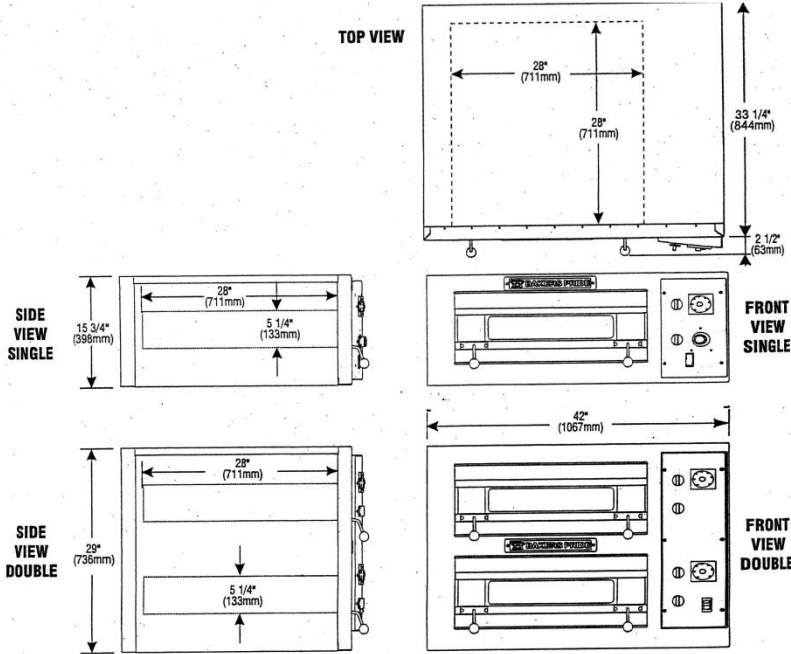

SHIPPING INFORMATION										
Model	SHIPPING WEIGHT		CARTON DIMENSIONS						Crate size	
	Lbs	Kilos	Width		Depth		Height		Cubic Feet	Cubic Meter
			In	mm	In	mm	In	mm		
E-1-2828	310	141	43.5	1105	46	1168	24.5	616	29	.80
E-2-2828	600	273	43.5	1105	46	1168	37.5	952	43.5	1.23

Shipping Class #110 each oven ships separately

MINIMUM CLEARANCES				
	Non-Combustible Construction*		Combustible Construction**	
	Inches	mm	Inches	mm
Left Side	1	25	1	25
Right Side	1	25	1	25
Rear	1	25	1	25

*In European Community countries and North America in NON-COMBUSTABLE locations only
 **In European Community only in COMBUSTABLE locations. NOT for North America

POWER SUPPLY						
Model	Watts	Voltage	Phase	Amps		
				L1	L2	L3
EP/EB-1-2828	4,750	208	1	22		
EP/EB-1-2828	4,750	208	3	15	15	16
EP/EB-1-2828	4,750	230	1	20		
EP/EB-1-2828	4,750	220/240	1	19		
EP/EB-1-2828	4,750	220/240	3	11	12	12
EP/EB-1-2828	4,750	400	3	6	7	6
EP/EB-2-2828	9,500	208	1	44		
EP/EB-2-2828	9,500	208	3	30	31	32
EP/EB-2-2828	9,500	230	1	39		
EP/EB-2-2828	9,500	220/240	1	38		
EP/EB-2-2828	9,500	220/240	3	22	23	23
EP/EB-2-2828	9,500	400	3	13	12	13

Each oven requires separate electrical connection . Specify 1 or 3 phase when ordering.

SPECIFICATIONS											
Model	DECK SIZE					OVERALL DIMENSIONS					
	In	mm	*Height		# of Decks	Width		Depth		Height	
			In	mm		In	mm	In	mm		
EP-1-2828	28x28	711x711	5 ¼	133	1	42	1067	33 ¼	845	15 ¼	400
EP-2-2828	28x28	711x711	5 ¼	133	2	42	1067	33 ¼	845	29	737
EB-1-2828	28x28	711x711	5 ¼	133	1	42	1067	33 ¼	845	15 ¼	400
EB-2-2828	28x28	711x711	5 ¼	133	2	42	1067	33 ¼	845	29	737

*Height excludes legs