

RESTAURANT SERIES ELECTRIC BAKERY DEPTH CONVECTION OVENS



Standard Features

The Restaurant Series Electric Bakery Depth Convection Ovens feature stainless steel exterior, porcelain enamel oven interior, interior lights, two-speed fan motor and 60-minute timer.

Options include: Stainless steel solid doors available; stainless steel bottom shelf & rack supports; extra oven rack

Design Features

- Energy efficient 10.5KW oven direct forced air heat system
- 208v, 60hz, 1 or 3 phase
- Electronic temperature control
- Stainless steel front, top and sides
- Stainless steel, 50/50 split dependent doors, with single mounted handles
- Stainless steel doors
- Double-pane thermal glass door windows
- Interior oven light
- 60-minute timer
- 150°F (65°C) to 550°F (288°C) temperature range
- 1/2 HP air-cooled two-speed fan motor
- Cool down fan mode
- Elements-on and temperature-ready indicator lights
- Porcelain enamel oven interior
- 11-Position removable rack guide with 1 5/8" spacing
- 5 Heavy-duty, positive-stop, chrome-plated wire racks
- ovens done in factory
- Heavy-duty industrial grade insulation in top, sides, back and doors
- Limited 1-year parts, labor and door warranty
- Accepts five 18" x 26" sheet pans in left to right or front to back positions.


Options & Accessories

- One glass door each
- Solid doors
- Stainless steel bottom shelf & rack supports
- Stainless steel shelf only
- Extra oven racks
- Casters

Certifications



RESTAURANT SERIES ELECTRIC BAKERY DEPTH CONVECTION OVENS

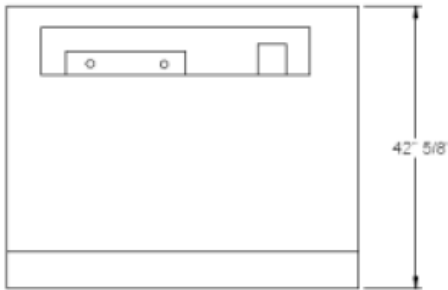

PRODUCT SPECIFICATIONS

Construction:

Heavy gauge steel construction. Stainless steel top, sides panels and front.

Clearance: For use only on non-combustible surfaces. Legs or stands are required for non-combustible floors; or 2 overhang is required when curb mounted. Provide 0" clearance from non-combustible surfaces and 4" from back, 10" from sides from combustible surfaces.

Electrical Requirements:

208V, 1ph, 53A / 208V, 3ph, 30A, 60hz,
Two speed motor 1/2 h.p. 1725/1140 RPM
240V, 1ph, 46A / 240V, 3ph, 26.5A, 60hz,

Dimensions:

BPCV-E1: 40W X 62H X 46D
BPCV-E2: 40W X 74 1/2H X 46D

Interior Dimensions:

29 1/4" W x 31 1/4" D x 24" H

Interior Dimensions including Rack Supports:

26 5/8" W x 26 1/2" D

Shipping:

BPCV-E1: 500 lbs
BPCV-E2: 1000 lbs

Freight Class: 85

FOB: Standex Dock

